

hovercam[®] beamio

Drahtloses USB-C Empfänger - Set


Beamio ist ein kabelloses HDMI-Transceiver-Set, mit der Sie ein kristallklares, verzögerungsfreies 4K-HDMI-Signal von Ihrem Computer auf jedes interaktive Display übertragen können.

Beamio nutzt die Gigabit-Funktechnologie, für ein einwandfreies HDMI-Signal mit einer Touch-Rückführung. Kein Setup notwendig und ohne Verwendung von WiFi, Passworteingabe oder anderen IT-Konfigurationen.



- 4K UHD Millimeter Wellen HDMI-Casting
- USB Touch-Rückführung bei Verwendung mit interaktiven Displays

- USB-C-Connectivity
- Effortless Setup
- Kein WiFi notwendig

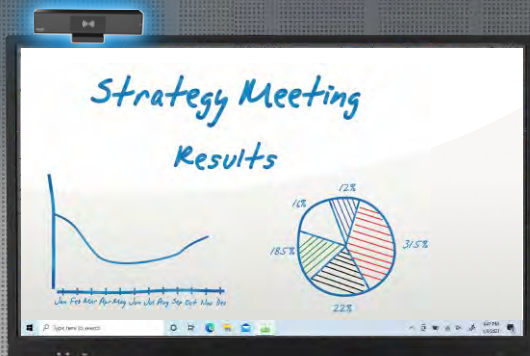

4K HDMI
USB TOUCH



Technical Specifications

Transmitter	
Support	Peer-to-peer, WHDI and HDMI 1.4/2.0 standards, AES128/256-bit image encryption function
Transmission	Using real-time wireless HD video transmission technology, no image delay, support 720P@30Hz, 1080P@30Hz, 1080P@60Hz, 4K@30Hz, 4K@60Hz
Wireless Distance	Wireless transmission distance of 30 meters
Operating frequency range	59.40 GHz to 63.56 GHz
Transmit power	12dBm
Antenna mode	Adopt PCB board antenna; antenna gain: 3dBi
Data transfer rate	Forward Channel: 3Gbps (Max)
Network mode	Peer-to-peer
Video format	HD: 480p, 576p, 720p, 1080i, 1080p, 4K
Signal-to-noise ratio	> 23 dB @ (-60 < Rx Pin < -45) dBm
Audio format	PCM, AAC, Dolby Digital 2.0/5.1, DTS 5.1, LPCM 5.1/7.1
Transmission distance	30 m (image quality level 4) (Indoor barrier-free distance)
HDMI protocol	Support HDMI 1.3 (optional hdmi1.4/2.0 3D); Support HDCP1.2
Signal light status	Wireless Connection LED: Bright: The Wi-Fi connection was successful, Slow blinking: The wireless network connection failed, Flashing Fast: Device Exception Video LED: Bright: The video signal output is normal, Not bright: Video signal output failed
Operating voltage	DC 5V/2A
Total power consumption	1080P/3.5W, 720P/2.8W
Temperature range	0~40°C (operating temperature); -20~80°C (storage temperature)
Product certification	FCC, CE, RoHS
Receiver	
Support	Peer-to-peer, WHDI and HDMI 1.4/2.0 standards, AES128/256-bit image encryption function Support high-definition display devices such as projectors and LED TVs with HDMI input interfaces.
Transmission	Using real-time wireless HD video transmission technology, no image delay, support 720P@30Hz, 1080P@30Hz, 1080P@60Hz, 4K@30Hz, 4K@60Hz
Wireless Distance	Wireless transmission distance of 30 meters
Features	Full hardware design, no need to install software, plug and play, simple and convenient
Operating frequency range	59.40 GHz to 63.56 GHz
Backhaul transmit power	8dBm
Antenna mode	PCB board antenna; Antenna Gain: 3dBi
Data Transfer rate	Forward Channel: 3Gbps (Max)
Network Mode	Peer-to-peer mode
Video format	HD: 480p, 576p, 720p, 1080i, 1080p, 4K
Signal-to-noise ratio	> 23 dB @ (-60 < Rx Pin < -45) dBm
Audio format	PCM, AAC, Dolby Digital 2.0/5.1, DTS 5.1, LPCM 5.1/7.1
Transmission distance	≥ 30 m (image quality level 4) (Indoor barrier-free distance)
HDMI protocol	Support HDMI 1.3 (optional HDMI 1.4 /2.0 3D), Support HDCP 1.2
Signal light status	Network LED: Bright: The Wi-Fi connection was successful, Slow blinking: The wireless network connection failed, Flashing Fast: Device exception Video LED: Bright: The video signal output is normal, Not bright: Video signal output failed
Operating voltage	DC 5V/2A
Total Power consumption	1080P/6W, 720P/4W
Temperature range	0~40°C (operating temperature), -20~80°C (storage temperature)
Product certification	FCC, CE, RoHS